



Guidance Note

Hydropower Guidance Note: HGN 9 Fish Screening

This guidance note is not intended as a statement of law. It should be read in combination with, and in the context of, the relevant enactments and EU obligations. Nothing in this guidance is intended to give Natural Resources Wales (NRW) power to do anything that it would not otherwise have power to do, or exercise any of its functions in a manner contrary to the provisions of any enactment or any EU obligation. In the event of any conflict between this guidance and enactments or EU obligations the latter takes precedence.

This Guidance Note has been prepared by Natural Resources Wales (NRW) to provide applicants for abstraction and impoundment licences for hydropower schemes with information on fish screening. Its contents may be updated periodically and developers should ensure they read the most recent version.

What are the issues?

The turbines in hydropower schemes can be harmful to fish if they pass through them. To avoid this harm it may be necessary to include appropriate fish screens and bywash in your scheme unless NRW agrees to exempt you from this obligation under section 14 of the Salmon and Freshwater Fisheries Act 1975. Screens may be needed to protect fish moving both downstream and upstream.

In most cases the screens used will form a physical barrier however alternative non-physical screening solutions may be appropriate and are discussed below. Physical barriers are known as 'positive exclusion screens'. Screens need to be of the appropriate design for the species of fish that may be present. .

Key aspects of fish screen design

This section sets out standard requirements for fish screens associated with hydropower schemes.

The design requirements for fish screens can vary across different parts of Wales. This reflects regional variations in climate and geology that affect fish growth. In particular, salmonid smolts tend to be smaller in colder areas and in places with low levels of nutrients. Table S1 sets out what may be typically appropriate for most hydropower

schemes but the final design should be based upon the shape and size ('morphology') of the fish which require protection.

You will need to provide evidence to support your proposal.

An effective design for downstream passage will combine:

- effective screening and diversion and
- a safe bywash route
- avoid unacceptably delaying passage of migratory fish

Where fish pass through the turbines in your scheme, the design of any downstream screens will need to allow fish to pass downstream while at the same time creating a barrier to fish migrating upstream.

Intake screening

The type of turbine used is a determining factor in assessing the extent of potential impact on the fish passing through it. Table 1 sets out the typical screening apertures. It is generally the case that the smaller the turbine size, the more damaging it can be to fish.

Table 1 - Summary of intake screens

Situation	At intake – fish screening requirements	
Traditional waterwheel Most Archimedes screw designs	Trash screen (100mm) may be necessary - see also detailed guidance in Tables 6, 7 and 8 as in some cases smaller aperture screens may be needed to provide protection for larger fish.	
Impulse turbines, such as Pelton and Turgo	Drop through screens ≤ 3.0 mm (for example Coanda style)	
All cross-flow turbines and other turbines with a maximum turbine flow < 1.5 m ³ per second	Migratory salmonids	≤ 10.0 mm
	Other species, including eels	≤ 12.5 mm (see notes)
	Where protection of salmonid parr or young of year coarse fish (O+) is required.	6.0mm Such screening can be used for part of the year when parr or young of the year fish require protection.
Any other turbine with a maximum turbine flow ≥ 1.5 m ³ per second (excluding cross-flow turbines)	Migratory salmonids	≤ 10.0 mm
	Other species, including eels	≤ 12.5 mm (see notes)

Notes:

Further information can be found on the Environment Agency website in the guidance document: *Screening for intake and outfalls: A best practice guide*.

The screen aperture and other arrangements necessary to protect eel are affected by the size of eel and the orientation of the screen (its angle to the flow). Screen apertures for adult eel can generally range from 9 mm to 20mm. For further guidance, please refer to Tables 2 to 8 and eel screening guidance on the Environment Agency website, Screening at intakes and outfalls: measures to protect eels.

Further protection may be required for species protected under specific legislation – such as lampreys, shad and bullhead where they are designated features of Habitats Directive sites.

If there are no eel or salmonids present, a screen aperture size of 12.5 mm is recommended. Where protection of young of year fish is needed, smaller screen apertures may be required depending upon the type of turbine used.

Screen aperture sizes must be based on evidence and linked to the size of fish which need to be prevented from passing through the screen. Table 1 assume that screening best practice for angle of screens is followed.

Screen design and orientation

The main design recommendations for fish exclusion screening are:

- Select the mesh size to ensure exclusion of the minimum target fish size, based on preventing penetration of the fish's head;
- The screen should be flush with the river bank for a lateral river intake or, when placed across a channel, angled (in plan view) relative to the channel to guide fish into a bywash. An angle of 30 degrees or less will typically be required. The angle is calculated such that the flow vector normal to the screen face is below the required escape velocity for the target fish species and sizes
- Screens may also be angled horizontally, as viewed from the side, but may require smaller screen apertures. A bywash is still required, and this should be located towards the top of the screen.
- Provide a suitable bywash, including arrangements for eel, if the screen is placed across the channel.

- Ensure the water velocities ahead of the screen are low enough to allow fish to escape without injury.
- Drop-through screens, typically used for high head schemes, can have different arrangements (see Screenings for intakes and outfalls: a best practice guide).
- Ensure that there is a suitable depth of water below a drop-through screen where fish are present, and that there are no parts of the structure that would damage fish as they pass over the screen and supporting structure.

The figures in the tables 2 - 8, with the exception of those for impulse turbines, are based on what is appropriate for screens constructed with either vertical or horizontal bars or a mesh-type arrangement.

If you use small screens – for example screens that are up to two metres across – you may align them at right angles to the flow. However, if you do this, there will need to be a bywash next to the screen and the bywash flow must be at the upper end of the acceptable range.

Where screens are positioned at right angles to the flow they offer no behavioural advantages to the screening process and have an increased risk of blinding. Screen apertures need to be of an appropriate size to prevent the relevant size species of fish from passing through or being trapped on the screens. These are likely to be smaller for those presented in Table 1 (excluding drop through screens)

Rectangular section bars or perforated plates are preferable to round-section bars. The latter are likely to trap fish by their gills and if used a smaller aperture between bars would be required. Bars need to be sufficiently stiff to maintain the design spacing right across the screen. You may need to fix horizontal tie-bars across the back of the screen.

Screen orientation and design should comply with Environment Agency screening guidance, found on their website:

- Screening for intake and outfalls: a best practice guide.
- Screening at intakes and outfalls: measures to protect eels.

Behavioural barriers and guidance methods

Fish deterrent systems are commonly known as ‘behavioural barriers’ or ‘behavioural screens’. In some cases these can be used as a substitute for, or supplement to, more conventional positive exclusion or physical fish screens. Some positive exclusion screens, when operated and maintained correctly, can keep all relevant sizes of fish out: behavioural screens are very unlikely to achieve this.

Fish have a number of well-developed senses. They can detect and react to light, sound and vibration, temperature, taste and odour, pressure change, touch, hydraulic shear, acceleration, electrical and possibly magnetic fields. Fish deterrent methods use one or more of these stimuli to seek to divert fish from the immediate area of the water intake. In some cases it will also help to guide them past the intake into a bywash or to a point downstream. Fish only respond to such deterrents if they are physically able to do so and if there is an alternative route. Even then the effectiveness of such screens is variable

A risk assessment will be needed for this type of screen or combination of screen types (see below).

There is further information on this in Screening for Intake and Outfalls: a best practice guide.

Tailrace screens

Fish that are migrating upstream may be attracted into tailrace channels. This may delay or prevent their migration. Mitigation measures may be needed to seek to prevent this unless there is a co-located fish pass. You may also need to install tailrace screens to direct fish away from a long tail race, prevent fish from entering a turbine, or direct fish towards a fish pass.

Physical or electric barriers can be effective as tailrace screens for salmonid or coarse fish. Electric barriers should be avoided where fish are allowed to pass through the turbine. We recommend physical barriers if there is a risk that fish could enter the turbine from the tailrace.

In general, tailrace screens are most effective when they are upright, placed close to the edge of the river bank at the point where the water from the turbine discharges back into

the river. They should be designed to guide fish to a fish pass entrance where appropriate. The cross-sectional area of the discharge should be sufficient to restrict the velocity of the discharge so that attractiveness to fish is limited.

Base your decision on the need for a tailrace screen on:

- the layout of the scheme, and
- the migratory fish species present.

Further details of tailrace screens are shown in Table 9.

Proposing a different screening regime

You may wish to propose different screen spacings to the recommended settings given here. This would be based on the specifics of your scheme design, the local environment and associated ecology. If you do, a risk assessment will be needed and assessed by NRW.

Risk assessment

This risk assessment should consider

- the species and size ranges of the fish that need protecting (including resident, migratory and recovering species)
- the deflection rates of the screens
- the mortality rates associated with the type of turbine to be deployed at the full range of scheme and river flow rates
- the overall effect that the proposed scheme may have on the fish population or on other animals that need to be protected.

Your risk assessment should show that your proposed screening arrangements would provide the same level of protection as the recommended screen requirements set out in Tables 1 to 8. If they do not, the proposal is likely to be rejected.

The risk assessment should include:

- an assessment of how efficiently the screen deflects the fish species to be protected: you also need to show how this 'deflection efficiency' may vary

- the mortality and /or injury rates for fish that may pass through the turbine

an assessment of how any additional mitigation measures, such as behavioural screens or cessation periods, would further increase the proportion of fish diverted to safety (the ‘additional deflection efficiency’).

Other mitigation measures

A number of mitigation measures may be compatible with using an over-spaced screen. These mitigation measures include:

- Stopping the turbines at times when there is a risk of entrapment or entrainment.
- The use of behavioural barriers, such as bubble curtains or strobe lights. These can be effective deterrents when used with a physical screen.

Further advice on this subject can be found in the Screening for Intake and Outfalls: a best practice guide.

Screen Approach Velocity

The ability of a fish species to swim (its ‘swimming performance’) is strongly influenced by the length of the fish and by water temperature. Fish approaching an intake need to be able to swim fast enough and for long enough to ensure their escape through the bywash – or by any other route provided to return them to the main river flow.

If you place the fish exclusion screen at a diagonal angle to the flow (as viewed from above), fish can be guided to the lower end of the diagonal, where a bywash can allow their safe transit downstream. The angle of the screen can be set to ensure that the escape velocity is kept below required design value.

A fish exclusion screen which is set at a diagonal angle to the flow will be better at diverting the fish towards the bywash than one set at right angles to the flow. You will need a bywash where the screens (including trash racks) are not located in the normal course of the river. If you have this arrangement and don’t plan to have a bywash in these circumstances, you will have to submit evidence that the scheme provides an adequate downstream passage for fish in another way.

Figure 1 shows the relevant velocity components for an angled fish barrier. For the purposes of designing the screen, the approach velocity U_e (also known as the ‘escape velocity’) is defined as the velocity 10 cm upstream of the screen, at right angles to the screen face. Where screens are not angled to the flow, approach velocities may need to be reduced.

If the screen is installed in a headrace, angle the screen diagonally across the flow. This enables the approach velocity to remain low even when the axial channel velocity (U_a) in the headrace is high. This has the added benefit of guiding fish towards the bywash entrance. Note that where you need to protect more than one species of fish, the approach velocity must be low enough for all the species to be protected.

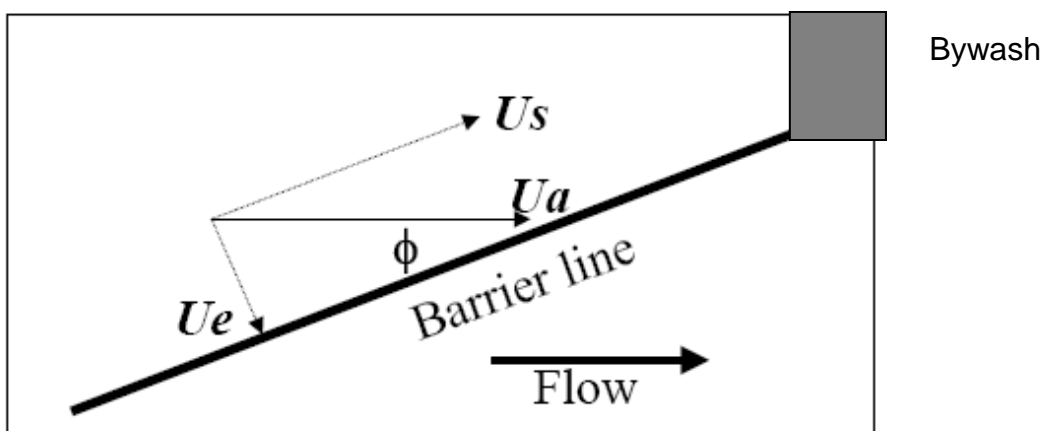


Figure 1 Flow velocity components in front of an angled fish barrier

U_a is the axial channel velocity; $U_e (=U_a \sin\Phi)$ is the fish escape velocity; and $U_s (=U_a \cos\Phi)$ is the sweeping velocity along the face of the screen.

Fish species	The maximum acceptable approach velocity towards any part of a screen (in metres per second)
Salmonid	0.60 m/s
Coarse fish and shad	0.25 m/s
Eel	0.50 m/s
Lamprey	0.30 m/s

Accounting for debris

Screen apertures can become blocked by debris. When this happens, the speed of the water as it approaches the screen increases – particularly if the screen is at right angles to the flow. This reduces the ability of the screen to divert fish to safety. You need to make sure that the water hitting the screen is not flowing so fast that fish cannot escape – in technical terms it must not exceed the target ‘approach velocity’, also known as the ‘escape velocity’.

There are three main approaches for tackling this problem:

- Automatic screen cleaning – the inclusion of an automatic screen cleaner will reduce the problem of debris. However, when deciding on the overall screen size, you will still need to assume that 10 per cent of the screen may be blocked.
- Manual clearance – if you plan to clear screens manually, you will need to be confident that the target approach velocity can be maintained even if up to 50 per cent of the screen is blocked.
- Self-cleaning drop-through screens

Screen bywash

The term ‘bywash’ describes the arrangement of flow that is needed to prevent fish becoming trapped by, or caught up in, the screening at a hydropower scheme and allow them to be safely delivered downstream.

Your hydropower scheme will need a screen bywash if the fish exclusion intake screen is not located in the normal course of the river – in other words if it is within the headrace.

Where your screen is angled, locate the bywash entrance at the downstream end of the screen. This takes advantage of the direction in which fish will be guided. Vertical screens would have the bywash at the top of the screen.

Make sure your bywash is designed to work effectively. Bywash flows should be in the range of 2-5 per cent of the scheme's design flow, based on the effectiveness and efficiency of the scheme design.

This percentage may need to be higher if the design of the bywash is poor – for example if the screen is aligned at right angles to the flow, the bywash is located away from the end of the screen, or if the hydraulic conditions at the entry to the bywash are poor.

A good design for a screen and bywash will:

- have a sweeping velocity that increases smoothly into the bywash entrance
- have an adequate entrance size – at least 0.4 - 0.5 m wide and deep
- avoid the creation of sharp shadows, particularly at the entrance to the bypass
- provide a smooth and safe conduit that avoids damaging the fish in transit and delivers the fish safely downstream
- prevent fish from trying to ascend the bywash

We will accept some types of fish pass instead of a bywash – provided that they can be suitably positioned. Suitable types include Larinier, Vertical-slot, Pool and traverse, or 'nature channel' fish passes. However, Denil, Alaskan A, or side-baffle passes might cause abrasion to the fish and are therefore not suitable for use as a bywash.

The point at which the bywash returns to the main channel (the 'bywash return point') should be sufficiently deep to prevent fish being stranded or damaged on impact. It should be at least 25 per cent of the difference between the height of the river up and downstream (the 'differential head') and no less than 0.3m deep.

Bywash entrances for adult eels should open at bed depth, preferably via a full-depth opening.

This section, apart from depth and delivery point, does not apply when drop-through screens are used (typically in high head schemes) since they should be designed to allow fish to safely pass over the screen.

The following tables provide additional detail on the screening requirements for specific turbine types

Table 2 - Pelton and turgo turbines

Where used – type of installation	Normally used on high-head systems.
Survival rate	Almost no fish survive if taken into turbine.
Notes	In most cases, operators use a 3mm (e.g. 3 mm Coanda-effect, wedge wire or perforated sheet) screening drop through a self-cleaning screen. This prevents the entry of debris that will damage the turbine.
Screens required for:	
Salmonid fry, under-yearling coarse fish, lamprey ammocoetes, salmonid parr, young of year coarse fish, or silver eels.	Max 3mm

Table 3 - Cross-flow turbines

Where used	Low-head schemes
Survival rate	The shape of the turbine and blades and the high rotation speed mean that very few of the fish taken into the turbine would survive.

Screens required for:	
Salmon and sea trout smolts, adult eels	10mm screens (based on size of smolts)
When salmonid parr and fry or young of year coarse fish are present or occur at the site	Default is 3mm from May to September

Table 4 - Smaller reaction turbines – for example Kaplan, Francis and other propeller turbines

Where used	Kaplan – used in high-flow and low-head conditions. Francis – used in a wide variety of flow and head conditions.
Survival rate	The shape of the turbine and blades and the rotation speed mean that few of the fish taken into the turbine would survive.
Notes	<p>If the turbine flow is less than $1.5\text{m}^3/\text{sec}^{-1}$, you will require screening to a similar specification to that required for cross-flow turbines – especially where there are autumn migrating smolts and juvenile trout.</p> <p>We will be able to help provide evidence for this need.</p> <p>For other propeller turbines, the risk to fish posed by the size and rotational speed of the turbine should be considered before appropriate screening is determined.</p>
Screens required for:	
<p>As default: Salmonid parr and fry, young of year coarse fish</p> <p>Otherwise: Salmon and sea trout smolts</p>	<p>3mm (May to Sept)</p> <p>10mm screens (based on size of smolts)</p>

<p>Eels</p> <p>Full details on screening for eels can be found on the Environment Agency website in the guidance Screening at intakes and outfalls: measures to protect eels.</p>	<p>Small adult eels (>30cm and < 50cm in length) - 9mm screens (where screen angles are >20 degrees). These are likely to be found lower down in the catchment.</p> <p>Large adult eels (>= 50cm in length) - 15mm screens (where screen angles are > 20 degrees)</p>
---	--

Table 5 - Larger reaction turbines – for example Kaplan, Francis and other propeller turbines

Where used	<p>Kaplan – used in high-flow and low-head conditions.</p> <p>Francis – used in a wide variety of flow and head conditions.</p>
Survival rate	<p>These larger turbines are considered to be safer for fish passing through.</p> <p>The damage rate for fish passing through a propeller type of turbine depends on the size/capacity of the turbine and the length and species of the fish at risk.</p>
Notes	<p>If you plan to use large Kaplan turbines (turbine flow \geq 1.5m³/s) with screens that differ from the default size below, you will need to carry out a risk assessment to demonstrate that the same degree of protection will be provided.</p> <p>The older type of low-head Francis turbine is less damaging to fish, but this type is no longer manufactured. Where re-furbished ones are used, a 10/12.5mm screen is necessary – to exclude smolts, other similarly sized fish, and eels.</p> <p>For other propeller turbines, the risk to fish posed by the size and rotational speed of the turbine should be considered before appropriate screening is determined.</p>
<p>Screens required for:</p>	

Salmon and sea trout smolts, adult eels	10mm screens (based on size of smolts)
Eels Full details on screening for eels can be found on the Environment Agency website in the guidance Screening at intakes and outfalls: measures to protect eels.	Small adult eels (>30cm and < 50cm in length) - 9mm screens (where screen angles are >20 degrees). These are likely to be found lower down in the catchment. Large adult eels (>50cm in length) - 15mm screens (where screen angles are > 20 degrees). These are likely to be found in more upstream catchments.

Table 6 - Archimedean screw turbines (3, 4 and 5 blade)

Where used	These are suited to low-head sites.
Survival rate	Archimedean Screw Hydropower Turbines (ASHTs) have been shown to cause minimal damage to fish, as long as there is appropriate protection on the leading edge of the screw and they are designed within acceptable limits.
Notes	
<p>Schemes designed within the parameters below are likely to require only trash screens, which must allow free passage of all affected species and age classes and be maintained free of debris. Protection to the leading edge of the blade will be necessary.</p> <p>As the licences for hydropower schemes are based on site specific information and the risk assessment associated with those turbines, the diameter and maximum speed of the turbine will need to be specified in the licence.</p>	

Turbine diameter and rotational speed

Number of blades	Minimum diameter of turbine (m)	Maximum rotational speed of turbine (rpm)
5	3.0	24
4	2.2	30
3	1.4	32

Variable speed ASHTs are preferred to fixed speed as they pose lower risks to fish for much of the time when they are operating at less than maximum power.

Where the diameter of the turbine is less than that specified in the table or the rotational speed is greater than in the table we will require fish screens and appropriate by-wash to be included in the scheme design.

Screen apertures will need to be sufficient to prevent passage of large fish at risk of being struck by turbine blades. An assessment will need to be undertaken to consider whether such species are present and require protection (e.g. eels or salmon and sea trout kelts or large rheophilic coarse species).

Screening will be specific to the fish requiring protection. Please note that fish of less than 60 cm in length are not considered to be at risk from damage through being struck by a turbine blade providing it is fitted with an appropriate compressible rubber bumper, see below.

Screw turbines with tip speeds at or above 3.5 m/s (approx. 2.5m diameter) should have compressible rubber bumpers fitted to the leading edges to safeguard the passage of large fish

Turbines with tip speeds below 3.5 m/s should have compressible rubber bumpers fitted although harder compounds may be acceptable. However, where there is a risk of large fish passing through the turbines, softer rubber bumpers will be required.

Maximum tip speeds

Tip speeds should not exceed a speed that would result in unacceptable impact forces. Based on current evidence turbines with a tip speed greater than 5m/s and/or a diameter exceeding 5.0 m will require additional protection for large fish, such as the inclusion of appropriate screening and by-wash facilities.

If you propose a scheme that falls outside these requirements, you will need to submit a risk assessment providing justification for any departure that shows equivalent levels of protection are provided.

Information required

Hydropower developers will need to provide information on various aspects of the ASHT design when submitting an application. These should include: the diameter, the number of blades, the rotational speed (rpm), the pitch of the screw, and whether it is fixed or variable speed. The type of compressible rubber bumper fitted and the gap between the blade and turbine housing will also need to be provided.

Installation and maintenance

It is essential that ASHTs are designed and maintained to specific standards. The following points should be addressed and where necessary appear as conditions within the licence.

- The leading edge must be at least 10mm within the perimeter of the trough before rubber bumpers are fitted
- The appropriate type of rubber bumper must be fitted correctly and must sweep within 5mm of the trough
- The gap between the turbine blade and the trough must be maintained to agreed tolerances throughout the length of the turbine (e.g. 5mm)
- The rubber bumpers fitted must be maintained in good condition
- To ensure these points are addressed it is recommended that they form part of the ongoing compliance assessment of schemes.

The clearance between the screw and the trough in which it runs must be checked at routine intervals and compared to permissible tolerance. An increase in the gap will increase the risk of injury to fish (and lead to a reduction in efficiency of the turbine).

Where checks indicate remedial action is required, operation must stop until remedial work has been completed. Remedial action can include the installation of screens and associated by-wash to prevent fish from entering the ASHT. The operator could choose to fit screens during the installation of the ASHT, in which case, the requirement to include rubber bumpers or regularly check design tolerances is removed.

Licence conditions

The abstraction or impoundment licence may specify:

- the diameter of the turbine
- the number of blades.
- the maximum rotation speed
- fixed or variable speed
- the magnitude and tolerance on the gap between screw and trough and the frequency of checks
- the type of compressible rubber bumper fitted to the leading edge of the blades

Screens required

Where the diameter of the turbine is less than that specified in the table or the rotational speed is greater than in the table, we will require the provision of fish screens and appropriate by-wash. We are also likely to require screening and by-wash if the diameter of the turbine exceeds 5.0m.

Screen apertures must be sufficient to prevent the passage of large fish at risk of being struck by turbine blades.

Screening will be specific to the fish requiring protection. An assessment will be required to consider whether such species are present and require protection (e.g. eels or salmon kelts).

You will need to submit evidence to confirm the size of fish present. We can then assess the need for fish screens and/or a bywash.

Fish of less than 60 cm in length are not likely to be damaged by impact with turbine blades, providing that appropriate compressible rubber bumpers are fitted (see below).

Table 7 - Waterwheels – overshot, backshot and breastshot

Overshot, backshot and breastshot waterwheels typically use buckets to transfer the water. These usually pose little risk to fish, providing that suitable gaps exist between the buckets and the housing of the wheel.

We recommend 100 mm trash screens for traditional overshot, backshot and breastshot water wheels. However, where there is an insufficient gap to protect fish smaller aperture screens will be needed.

In all cases, take account of the species and size of fish that will have to pass the wheel and consider the risk of their being damaged and/or trapped. Where fish will be damaged or trapped, appropriate screening will be required.

Note: Original artwork by Daniel M. Short reproduced under license <http://creativecommons.org/licenses/by/2.5/>


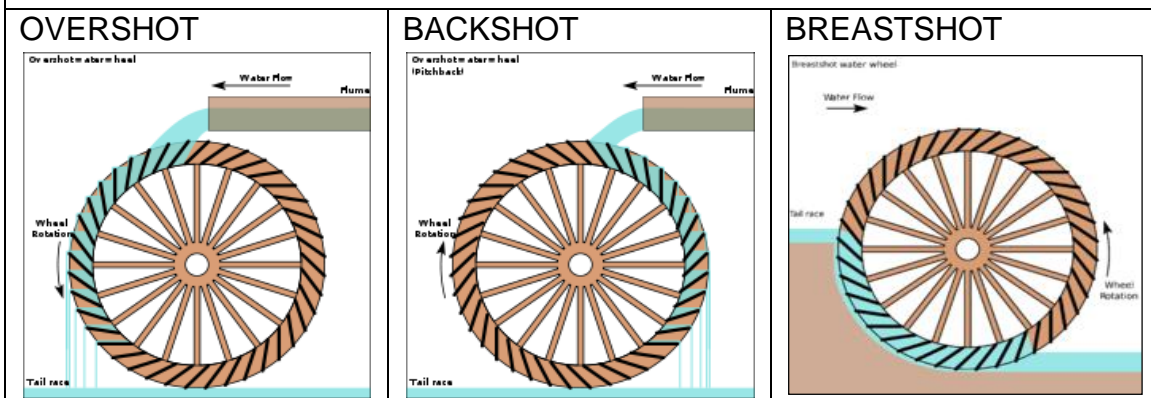


Table 8 - Waterwheels – undershot and poncelet

Undershot and poncelet waterwheels are typically used where there is a very low head.

The wheels (and paddles) in undershot and poncelet designs need to be a close fit in the channel to obtain good efficiency. The limited clearance around the wheels creates a significant risk of damage to fish. Screening will therefore be required.

In all cases, take account of the species and size of fish that will have to pass the wheel and consider the risk of their being damaged and/or trapped. Where fish will be damaged or trapped, appropriate screening will be required.

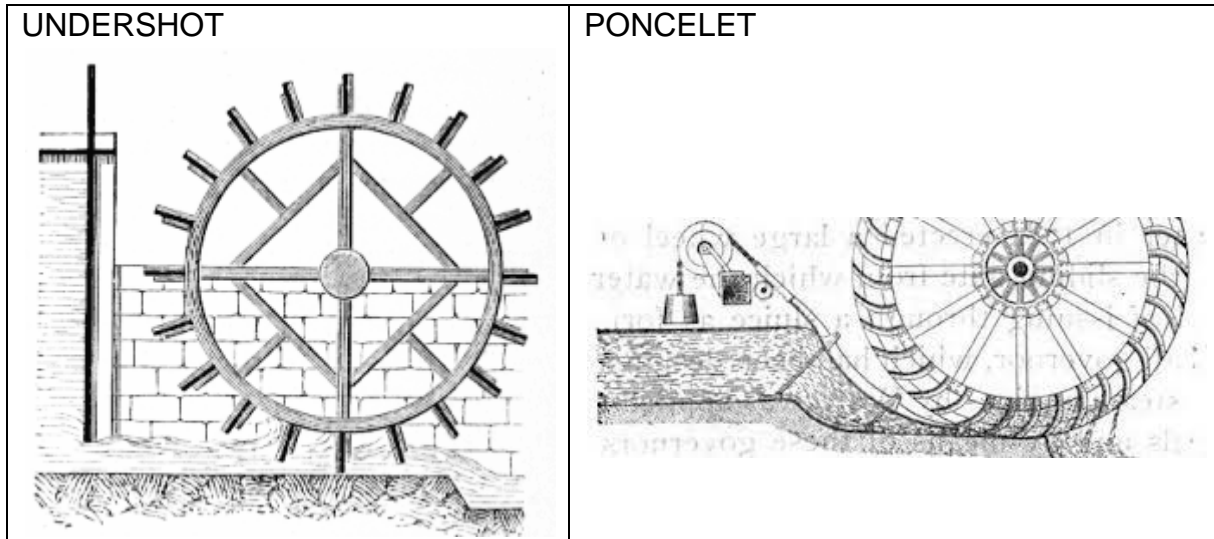

Other turbine types

From time to time new technologies are proposed for hydropower generation. To support their approval we may request evidence and require the developer or promoter of the technology to carry out a risk assessment.

The risk assessment is a staged process and is designed to assess risks by building on the existing evidence base, rather than replicating previous work. Depending on the results of a desk-based assessment, we may require that further evidence is provided.

We encourage developers to discuss plans with us at an early stage if considering development or use a turbine type or technology not outlined in the screening tables.

Summary of tailrace screens

Table 9 - Turbine type and **typical** requirements for tailrace screens

Screen type	At outfall – fish screening requirements
Electric barrier	<p>Only use these where fish cannot pass downstream through the turbines. Barriers with graduated field types are preferred. It is essential that these barriers are always in operation, even when the hydropower plant is not running. Otherwise fish may enter the turbines and be present when they re-start. There must be an externally visible indicator light, or other means of checking, so that the operator or regulator can confirm that barrier is switched on.</p> <p>Check the voltage field annually in the water using a suitable test device. Compare the reading to the specification, in order to ensure that electrodes are in good condition.</p>
Physical bar screens	<p>These should have a 40 mm spacing for salmon, or 30 mm where there are sea trout (exceptionally where many small sea trout are present 25mm screens may be required). The spacing required to protect other species should be determined on a site-by-site basis.</p> <p>Construct screens from wedge wire, square or oblong metal bars. Round or oval bars are more likely to gill fish.</p>